



Blue StormTM
International



PRIVATE & COMMERCIAL POOL


PROFESSIONAL EQUIPMENT CATALOG 23|24

BOBBIN WOUND SAND FILTER

- **Maximum Working Pressure** ➤ **Maximum Temperature**
250kpa/36psi (2.5bar) 50°C (122F)
400kpa/58psi (4.0bar)
- **Factory Testing Pressure** ➤ **Size of Gravel**
400kpa/58psi (4.0bar) 0.5mm" 0.8mm
600kpa/86psi (6.0bar)



- ✦ UV resistant wound structural fiberglass tanks.
- ✦ Large combination sand/water drain for easy winterizing.
- ✦ Sight glass for inspection of filtering process.
- ✦ Bolt style top mount valve combines with the filter perfectly.

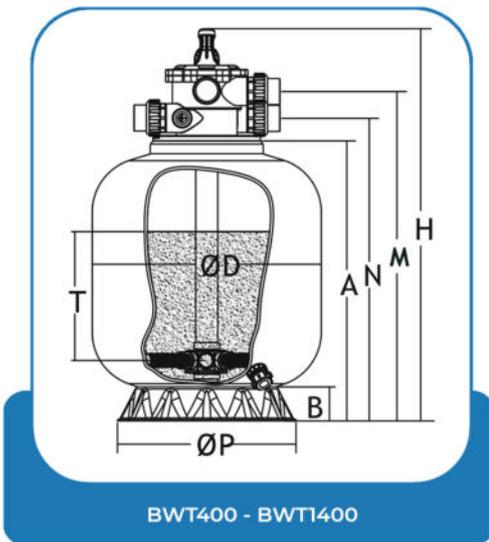

Model	Filter Diameter (mm)	Filter Height (mm)	Design Flow (m ³ /m)	Filter Area (m ²)	Connections (inch/mm)	Sand Weight (kg)
BWT400	400	750	6	0.13	1.5750	30
BWT450	450	810	8	0.16	1.5750	45
BWT500	530	870	11	0.22	1.5"/50	80
BWT650	630	870	15	0.32	1.5"/50	130
BWT650B	630	920	16	0.32	2763	130
BWT700	700	960	19	0.38	1.5750	190
BWT700B	700	1010	20	0.38	2763	190
BWT750	750	1120	22	0.44	2763	230
BWT800	800	1130	25	0.50	2763	260
BWT900	900	1270	32	0.64	2763	400
BWT1000	1000	1340	38.7	0.79	2763	600
BWT1100	1100	1460	43	0.95	2763	800
BWT1200	1200	1540	51	1.13	2763	900
BWT1400	1400	1750	68	1.53	2763	1400

Model	BWT400	BWT450	BWT500	BWT650	BWT650B	BWT700	BWT700B	BWT750	BWT800	BWT900	BWT1000	BWT1100	BWT1200	BWT1400
D(MM)	400	450	530	630	630	700	700	750	800	900	1000	1100	1200	1400
H(MM)	750	810	870	870	920	960	1010	1120	1130	1270	1340	1460	1540	1750
A(MM)	500	560	620	620	620	710	710	820	830	970	1040	1160	1240	1450
B(MM)	73	75	75	95	95	95	95	95	150	150	150	180	180	180
M(MM)	609	669	729	729	762	823	852	962	972	1112	1182	1302	1392	1592
N(MM)	550	610	670	670	682	764	772	882	892	1032	1102	1222	1312	1512
P(MM)	315	390	390	565	565	565	565	565	790	790	790	1010	1010	1010
T(MM)	160	230	260	300	300	400	400	490	490	500	520	570	650	850

BOBBIN WOUND SAND FILTER

➤ **Maximum Working Pressure** ➤ **Maximum Temperature**

250kpa/36psi (2.5bar)
400kpa/58psi (4.0bar)

50°C (122F)


➤ **Factory Testing Pressure** ➤ **Size of Gravel**

400kpa/58psi (4.0bar)
600kpa/86psi (6.0bar)

0.5mm" 0.8mm



- + UV resistant wound structural fiberglass tanks.
- + Large combination sand/water drain for easy winterizing.
- + Sight glass for inspection of filtering process.
- + Bolt style top mount valve combines with the filter perfectly.

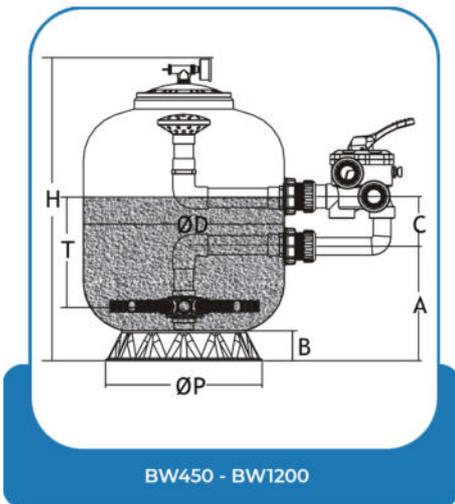


Model	Filter Diameter (mm)	Filter Height (mm)	Design Flow (m ³ /m)	Filter Area (m ²)	Connections (inch/mm)	Sand Weight (kg)
BW450	450	640	8	0.16	1.5"/50	45
BW500	500	680	10	0.20	1.5"/50	80
BW650	630	750	15	0.32	1.5"/50	130
BW700	700	820	19	0.38	1.5"/50	190
BW750	750	940	22	0.44	2"/63	230
BW800	800	980	25	0.50	2"/63	260
BW900	900	1070	32	0.64	2"/63	400
BW1000	1000	1190	38.7	0.79	2"/63	600
BW1100	1100	1300	43	0.95	2"/63	800
BW1200	1200	1380	51	1.13	2"/63	920


Model	BW450	BW500	BW650	BW700	BW750	BW800	BW900	BW1000	BW1100	BW1200
D(MM)	450	500	635	700	750	800	900	1000	1100	1200
H(MM)	640	680	750	820	940	980	1070	1190	1300	1380
A(MM)	260	280	310	360	385	385	430	460	650	650
B(MM)	75	75	95	95	95	150	150	150	180	180
C(MM)	125	125	125	125	220	220	220	220	220	220
P(MM)	390	390	565	565	565	790	790	790	1010	1010
T(MM)	250	280	300	350	410	410	480	510	560	600

SPURT SERIES SELF PRIMING POOL PUMP


- ▶ Liquid temperature: 5-50° C.
- ▶ Ambient temperature ≤50° C .
- ▶ Max. Working pressure: 0.3MPa.
- ▶ IPX5 waterproof standard.
- ▶ Thermal protection included.
- ▶ Single phase: 220V/50Hz.
- ▶ 220V/60Hz, 110V/60Hz; 380V/50Hz (P≥450W)
- ▶ are available on request.
- ▶ Max. Suction: 3M (P≥600W)
- ▶ Insulation Class F

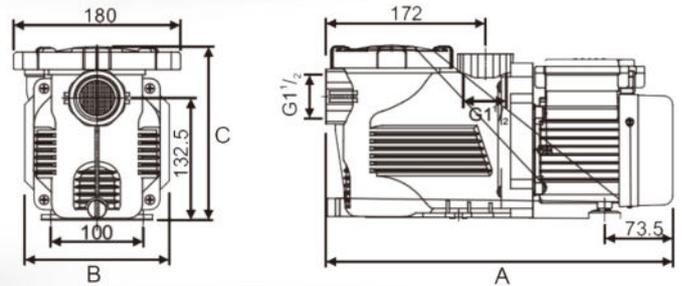

PH040-PH060

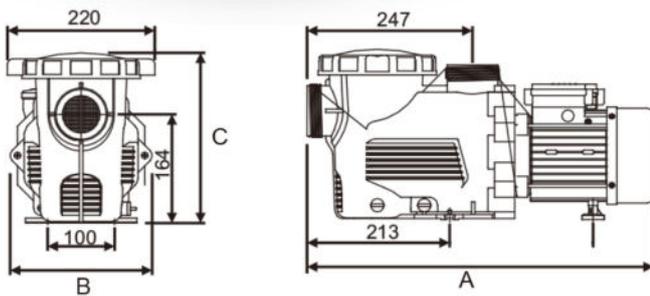



PH075-PH300

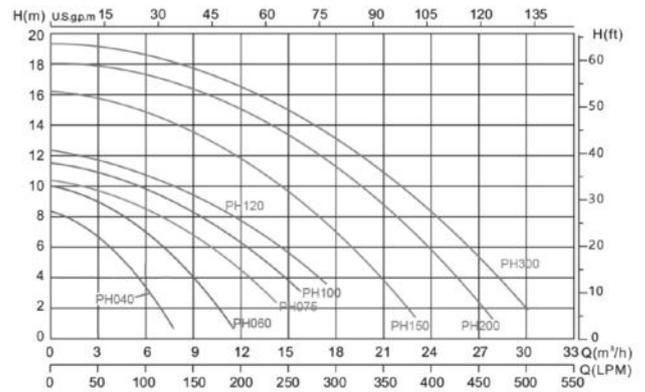

Model	Horsepower (HP)	Voltage (V)	Rated Power (Kw)	Qmax (L/min)	Hmax (m)	Weight (Kg)	Inlet/Outlet (mm)	A (mm)	B (mm)	C (mm)
PH033	0.33	220	0.25	120	75	5.6	48/50	374	156	188.5
PH050	0.5	220	0.35	160	9.5	6.0	48/50	374	156	188.5
PH075	0.75	220	0.55	235	10.5	6.2	48/50	405	212	256
PH100	1.0	220	0.75	260	11.5	6.8	48/50	405	212	256
PH120	1.2	220	0.85	285	12	72	48/50	405	212	256
PH150	1.5	220	1.10	375	16	11.8	60/63	518	212	256
PH200	2.0	220	1.60	465	18	14.8	60/63	548	212	256
PH300	3.0	220	2.20	515	19.5	17.5	60/63	548	212	256

STREM FLOW DERIES POOL PUMP



- ▶ Use high quality polypropylene to make the pump more durable.
- ▶ Ceramic carbon mechanical seal is more safe and stable.
- ▶ New design for the inner part improve the efficiency and reduce the noise.
- ▶ High performance motor with thermal protection
- ▶ Pump inlet/outlet with external thread can connect with metric/imperial pipe more convenient to operate
- ▶ Insulation Class F

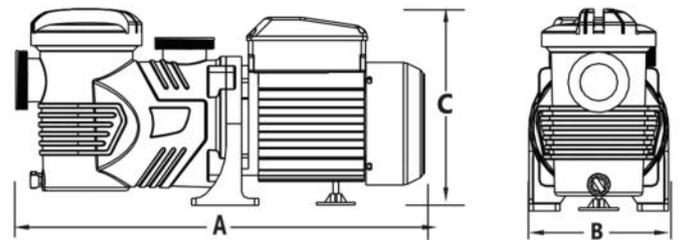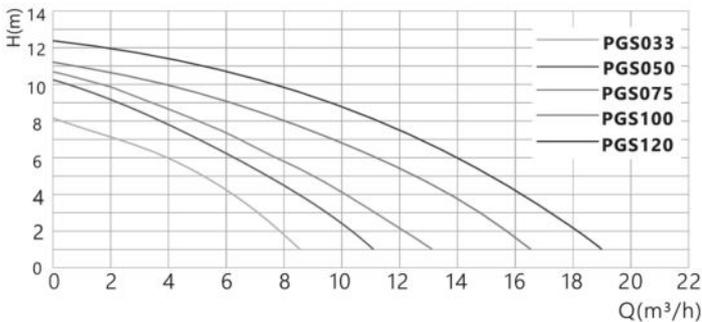

Model	Motor Power (HP)	Voltage (V)	Frequency (RPM)	Qmax (m³/h)	Hmax (mtr)	Connection (mm)	A (mm)	B (mm)	C (mm)
PGS033	0.33	220-240	2850	8.5	8.1	48/50	460	160	230
PGS050	0.5	220-240	2850	11.0	10.2	48/50	460	160	230
PGS075	0.75	220-240	2850	13.0	10.8	48/50	485	160	230
PGS100	1.0	220-240	2850	16.5	11.2	60/63	485	160	230
PGS120	1.2	220-240	2850	19.0	12.4	60/63	485	160	230

STREM FLOW PLUS DERIES POOL PUMP

- ▶ Use high quality polypropylene to make the pump more durable.
- ▶ Carbon with ceramics mechanical seal is more safe and stable.
- ▶ New design for the inner part improve the efficiency and reduce the noise.
- ▶ High performance motor with thermal protection
- ▶ The pump can bear 25000 times of impact test, excellent performance and reliable quality.
- ▶ Insulation Class F

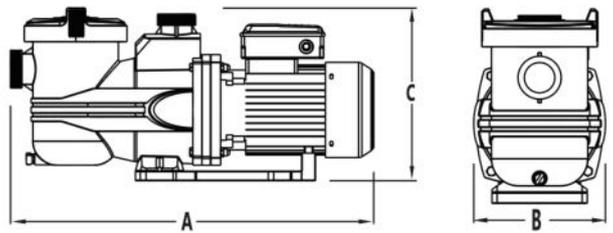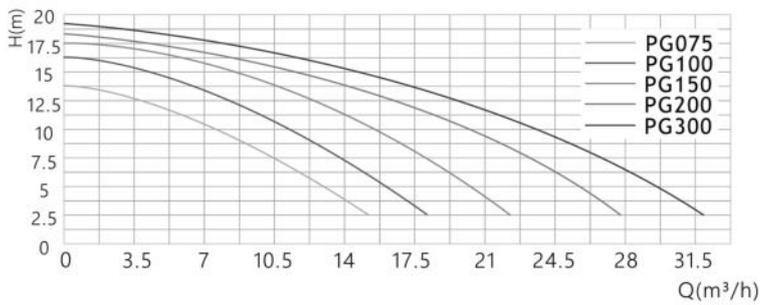

Model	Motor Power (HP)	Voltage (V)	Frequency (RPM)	Qmax (m ³ /h)	Hmax (mtr)	Connection (mm)	A (mm)	B (mm)	C (mm)
PG075	0.75	220/380	2850	15.3	14	48/50	595	200	295
PG100	1.0	220/380	2850	17.6	16	48/50	595	200	295
PG150	1.5	220/380	2850	22.5	17.5	48/50	605	200	295
PG200	2.0	220/380	2850	27.9	18	60/63	605	200	295
PG300	3.0	220/380	2850	32.1	19	60/63	605	200	295


WALL SKIMMER - SSK




Precision and quality are the hallmarks of all bluestorm skimmers, minimizing installation time and maximizing user satisfaction. Having an ABS skimmer will ensure that it has a shiny bright finish that will remain bright over time thanks to an anti-UV treatment and it will also withstand the reaction of pool chemicals under normal conditions.




Model	Color	Material	Application
090010	White	ABS	Concrete Pool

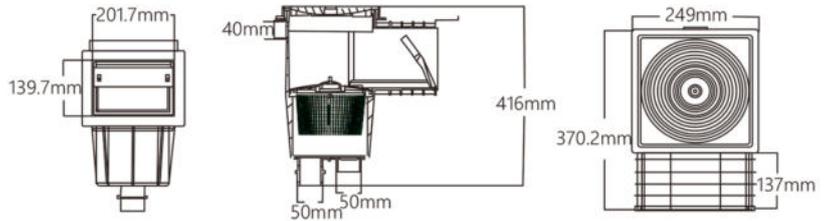

Model	Color	Material	Application
099911	White	ABS	Liner Pool

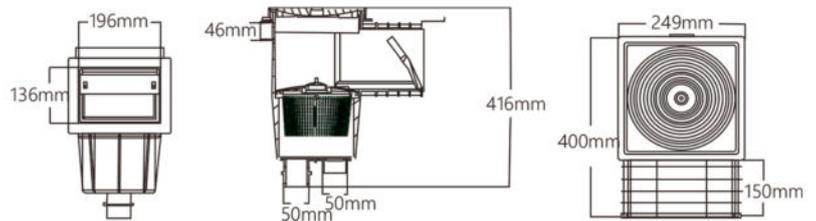

Model	Color	Material	Application
090010	White	ABS	Concrete Pool

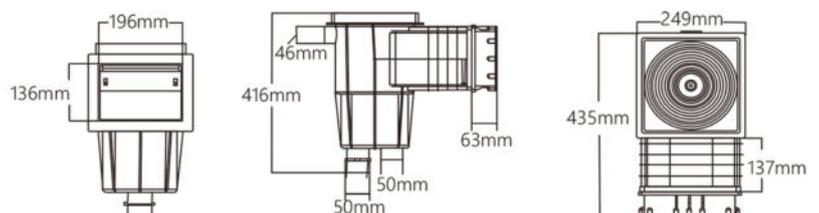

STANDARD SKIMMER WITH EXTENDED THROAT


WALL SKIMMER - WSK



Precision and quality are the hallmarks of all bluestorm skimmers, minimizing installation time and maximizing user satisfaction. Having an ABS skimmer will ensure that it has a shiny bright finish that will remain bright over time thanks to an anti-UV treatment and it will also withstand the reaction of pool chemicals under normal conditions.




Model	Color	Material	Application
090014	White	ABS	Liner Pool

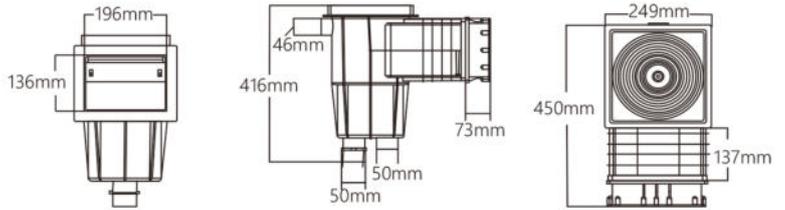


STANDARD SKIMMER WITH EXTENDED THROAT




Model	Color	Material	Application
090020	White	ABS	Concrete Pool

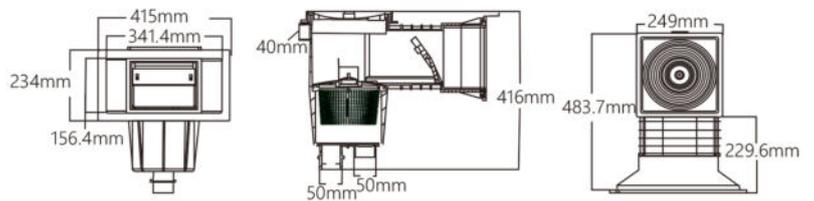

Model	Color	Material	Application
090021	White	ABS	Liner Pool

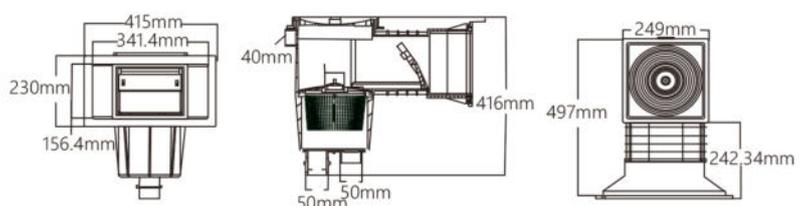

SUCTION FITTING


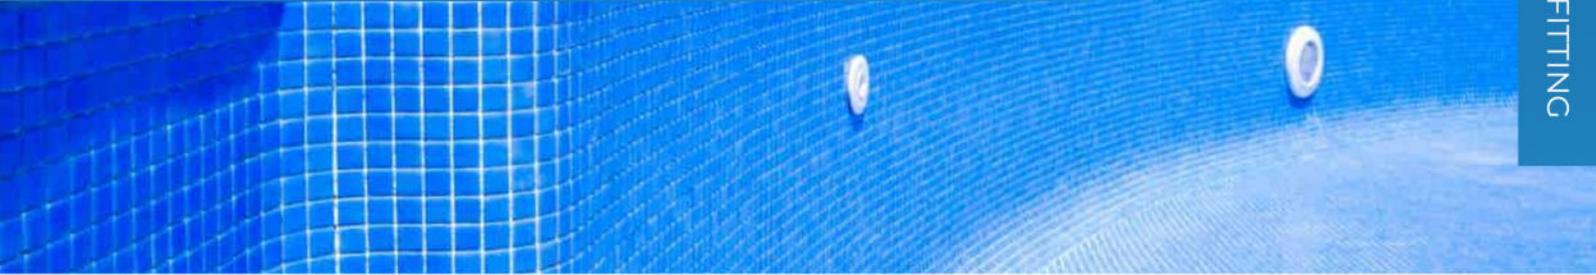


Bluestorm white goods fittings are made of white ABS and UV treated material, and drains are fitted with stainless steel screws for maximum resistance to pool chemicals.



VP





Model	Color	Material	Application
092827	White	ABS	Concrete Pool




Model	Color	Material	Application
092827	White	ABS	Concrete Pool



Model	Color	Material	Application
092827	White	ABS	Concrete Pool



Model	Color	Material	Application
092827	White	ABS	Concrete Pool





INLET FITTING



WI



Model	Color	Material
092827	White	ABS





Model	Color	Material
092827	White	ABS





GD



Model	Color	Material
092827	White	ABS



Model	Color	Material
092827	White	ABS




DRAINS



DT



Model	Color	Material
2817	White	ABS

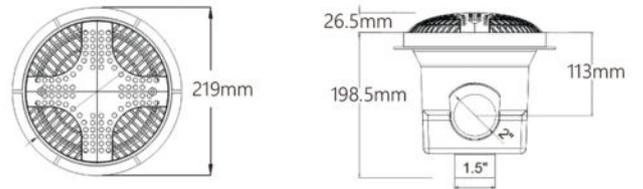


DTA



Model	Color	Material
2818	White	ABS




Model	Color	Material
2830	White	ABS

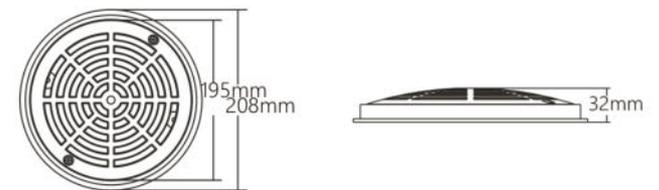

BD



Model	Cmm	Dmm	Color	Material
2809	32	230	White	ABS
2811	35	263		
2812	32	303		
2813	35	336		
2814	66	490		




DRAINS





BDA



Model	Cmm	Dmm	Color	Material
2816	70	263	White	ABS



Model	Color	Material
● 092840	Grey	ABS
● 092840-1	Grey	ABS






- Wall Conduit w/ 50mm Threaded Ext. and 2" Nonthreaded Int.
- Wall Conduit w/ 50mm Threaded Ext. and 2" Threaded Int.

CB





Model	Color	Material
092823	White	ABS




CONNECTION BOX WITH 3 CONNECTIONS IN 3/4"



Model	Material
CV-50	ABS





GRATINGS - MG


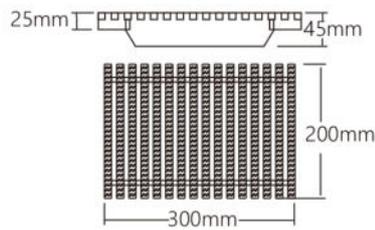


5PCS ARE ONE METER


2030	Model
WHITE	Color
ABS	Material

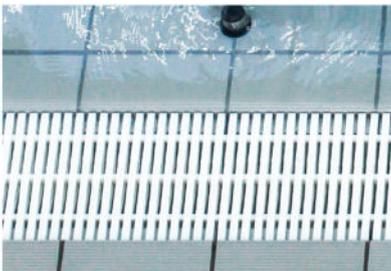

2518A 2520A 2525A 2530A	Model
WHITE	Color
ABS	Material

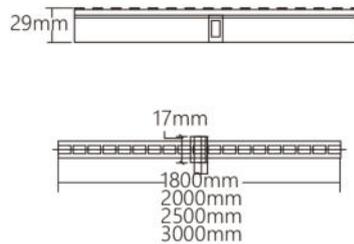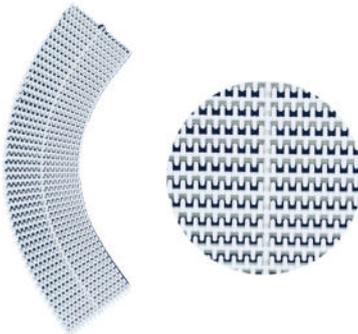

2518B 2520B 2525B 2530B	Model
WHITE	Color
ABS	Material

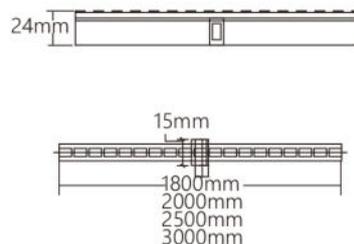

2518C 2520C 2525C 2530C	Model
WHITE	Color
ABS	Material

LEAF NET- MK



ALUMINIUM LEAF SKIMMER

5878



STANDARD LEAF SKIMMER

5456



DEEP RAKE LEAF

7688



HEAVY DUTY PLASTIC
LEAF SKIMMER

5668



DELUXE LEAF SKIMMER

8068

LEAF NET- MK



ADVANCED LEAF SKIMMER

1311



ADVANCED DEEP LEAF RAKE

1208



FULL PLASTIC LEAF SKIMMER

1323



FULL PLASTIC DEEP WATER
LEAF RAKE

1220



PROFESSIONAL HEAVY DUTY
ALUMINUM DEEP RAKE

6608

BRUSH



DELUXE VACCUM POOL BRUSH

5618



DELUXE NE DESIGNES LONG BRUSH

8808



10"/"26CM STAINLESS STEEL
ALAGE BRUSH

5248



STANDARD DURABLE LONG
GLUE POOL BRUSH

1411

BRUSH



FLEXIBLE BRUSH WITH
ALUMINIUM HANDLE

8908



18"/45CM DELUXE WALL BRUSH
WITH ALUMINIUM HANDLE

5258



FLEXIBLE POOL BRUSH

8048



DURABLE LARGE PLASTIC
POOL BRUSH

1438

VACUUM HEAD



VACUUM HEAD WITH
FOUR WHEELS

9018



DELUXE LARGE VACUM HEAD
WITH FOUR WHEELS

9028



DELUXE TRIANGULAR
VACUUM HEAD

5528



DELUXE NEW DESIGNED
VACUUM BRUSH

5628

VACUUM HEAD



DELUXE PENTAGONAL
VACUUM HEAD

5648



DURABLE VACUUM HEAD

5548



NOVEL VACUUM HEAD

5558



DELUXE LARGE
VACUUM HEAD

6088

FLOATING DISPENSER



Deluxe large chemical dispenser for 3" tablet

5648



Chemical dispenser for 3" tablets

5638



Expandable floating dispenser for 3" tablets

5316



Chemical dispenser for 1-1/2" tablets

5326



Deluxe chemical dispenser for 3" tablets

5346



Large duck chemical dispenser for 3" tablets

5356

TEST KIT



TEST KIT



Basic PH&CL test kit

5298



5-way test kit
(PH/CL/Bromine/
Alkalinity/
Acid Demand)

6048



Basic PH&CL test kit

5398



4-Way test kit
(PH/CL/Alkalinity/
Acid Demand)

6068



2-Way DPD test kit
with 5346 2*10 tablets

6038



Refill set for 5-way
test kit

6078

HOSE REEL



9068



Model	Size
8498BU	EXTRUDED PE. 1 1/2"-7M
	EXTRUDED PE. 1 1/2"-7.5M
	EXTRUDED PE. 1 1/2"-9M
	EXTRUDED PE. 1 1/2"-10.5M
	EXTRUDED PE. 1 1/2"-11M
	EXTRUDED PE. 1 1/2"-13M
	EXTRUDED PE. 1 1/2"-15M
	EXTRUDED PE. 1



Model	Size
8588BU	SPIRAL WOUND EVA. 1 1/4"-6M
8608BU	SPIRAL WOUND EVA. 1 1/4"-9M
8628BU	SPIRAL WOUND EVA. 1 1/4"-12M
8638BU	SPIRAL WOUND EVA. 1 1/2"-7.5M
8648BU	SPIRAL WOUND EVA. 1 1/2"-9M
8658BU	SPIRAL WOUND EVA. 1 1/2"-10.5M
8468BU	SPIRAL WOUND EVA. 1 1/2"-11M
8138BU	SPIRAL WOUND EVA. 1 1/2"-13M
8688BU	SPIRAL WOUND EVA. 1 1/2"-15M
8689BU	SPIRAL WOUND EVA. 1 1/2"-30M

TELESCOPIC POLE



Telescopic Poles are constructed of aluminum tubing. With the wall thickness of 0.8mm & 1.2mm, It comes with vinyl handle and user-friendly grip lock. Turning the white knob can extend and shorten the telescopic pole . Designed to work with hand skimmers, leaf rakes, brushes and vacuum heads

Model	Size
5978BU	2*120CM SMOOTH POLE-0.8MM THICK
5968BU	2*180CM SMOOTH POLE-0.8MM THICK
5958BU	2*240CM SMOOTH POLE-0.8MM THICK
5935BU	2*350CM SMOOTH POLE-0.8MM THICK
5938BU	3*100CM SMOOTH POLE-0.8MM THICK
5948BU	3*120CM SMOOTH POLE-0.8MM THICK
6348BU	2*120CM RIBBED POLE-0.8MM THICK
6338BU	2*180CM RIBBED POLE-0.8MM THICK
6328BU	2*240CM RIBBED POLE-0.8MM THICK
6218BU	3*100CM RIBBED POLE-0.8MM THICK
6638BU	3*120CM RIBBED POLE-0.8MM THICK
8998BU	2*120CM RIBBED POLE-1.1MM THICK
7548BU	2*240CM RIBBED POLE-1.1MM THICK
6359BU	2*300CM RIBBED POLE-1.1MM THICK
7788BU	3*120CM RIBBED POLE-1.1MM THICK
7358BU	3*300CM RIBBED POLE-1.1MM THICK


UNDERWATER LIGHTS



- **Waterproof standard**
IP68
- **Material**
ABS, PC
- **Cable Length**
2.0m
- **Installation**
Wall Mounted



Product Size

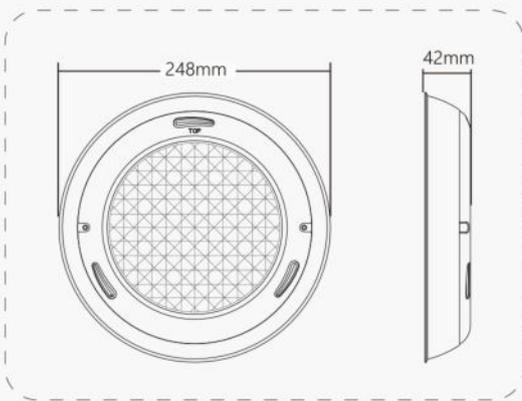

Colour



Warm white




Cool white



RGB





High quality lamp



Economic model lamp

Model	Power (M)	Voltage (V)	Niche	Light Material	Lens Material	Cable Length (m)
TLYP-LED72	6	12	Concrete	ABS	PC	2.0
TLYP-LED144	12	12	Concrete	ABS	PC	2.0
TLYP-LED252	18	12	Concrete	ABS	PC	2.0
TLYP-LED324	24	12	Concrete	ABS	PC	2.0
TLYP-LED12L	12	12	Concrete	ABS	PC	2.0
TLYP-LED18L	18	12	Concrete	ABS	PC	2.0
TLYP-LED24L	24	12	Concrete	ABS	PC	2.0

LED LIGHT REMOTE CONTROL

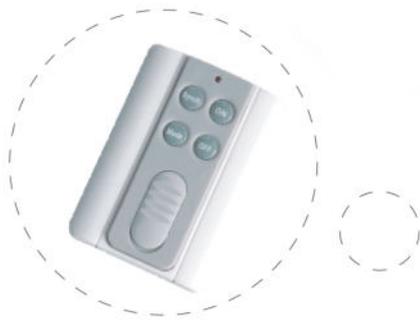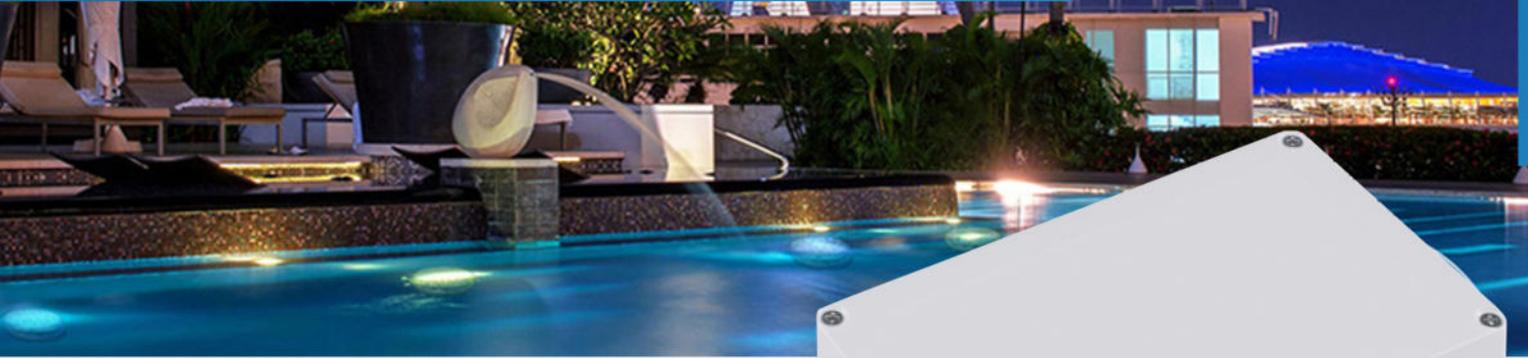

- + All of the 12V AC input LED lights can be controlled by this system
- + The system must be installed against the rain and sunlight

- + One control box can control 5 pieces of 252 LEDs lights or 2 pieces of 546 LEDs lights or 15 pieces of 72 LEDs lights.

Available Range

Can be used for the SPA pool/seascape pool/ourdoor swimming pool...



SPA Pool



Seascape Pool



Ourdoor Swimming Pool

LED LIGHT POWER SUPPLY UNIT



Size

200*120*75mm (01-04)

320*270*120mm (05)

Environmental temperature

-40°C ~ + 70°C

Remote control area

50°C (122F)

dBm

-101



YAQ-01/03 (No Transformer)




YAQ-02/03/04 (With Transformer)

Model	Weight (kg)	Power	Input voltage	Output Voltage	Input current	Output current	Static current
YAQ-01	0.75	100W	12VAC	12VAC	8.3A	8.3A	<6MA
YAQ-02	2.30	100W	220V-240VAC	12VAC	0.43A	8.3A	<6MA
YAQ-03	0.80	300W	12VAC	12VAC	25A	25A	<6MA
YAQ-04	2.60	150W	220V-240VAC	12VAC	0.65A	12.5A	<6MA
YAQ-05	4.80	300W	220V-240VAC	12VAC	25A	8.3A	<6MA

POOL LADDER - MR (SS316)



Bluestorm ladders are made of stainless steel AISI 316, with a bright polished finish and fitted with a non-slip material for the swimmer's safety and convenience.

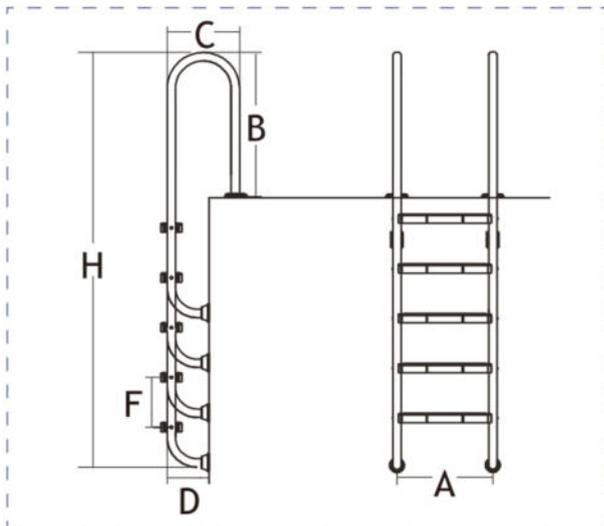


Holding Bracket

Model	Steps	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
MR-202B	2	500	630	320	180	250	1310
MR-203B	3	500	630	320	180	250	1310
MR-204B	4	500	630	320	180	250	1310
MR-205B	5	500	630	320	180	250	1310

POOL LADDER - **FM** (SS316)



Bluestorm ladders are made of stainless steel AISI 316, with a bright polished finish and fitted with a non-slip material for the swimmer's safety and convenience.

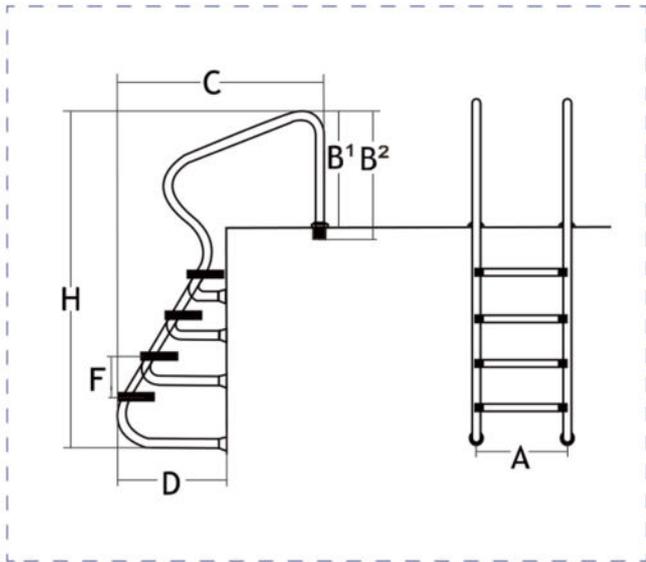


Model	Steps	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
FM-202B	2	500	620	690	806	316	1450
FM-203B	3	500	620	690	918	428	1450
FM-204B	4	500	620	690	1031	541	1450
FM-205B	5	500	620	690	1144	654	1450

POOL LADDER - ML (SS316)



Bluestorm ladders are made of stainless steel AISI 316, with a bright polished finish and fitted with a non-slip material for the swimmer's safety and convenience.

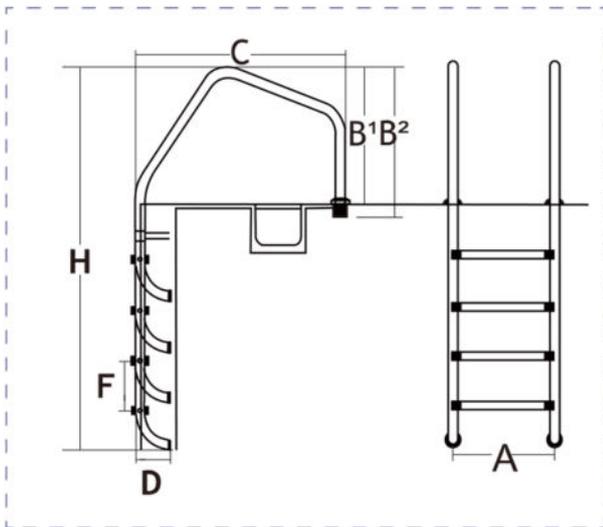


Model	Steps	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
ML-202B	2	500	750	820	1022	250	1460
ML-203B	3	500	750	820	1022	250	1710
ML-204B	4	500	750	820	1022	250	1960
ML-205B	5	500	750	820	1022	250	2210

POOL LADDER - S (SS316)



Bluestorm ladders are made of stainless steel AISI 316, with a bright polished finish and fitted with a non-slip material for the swimmer's safety and convenience.

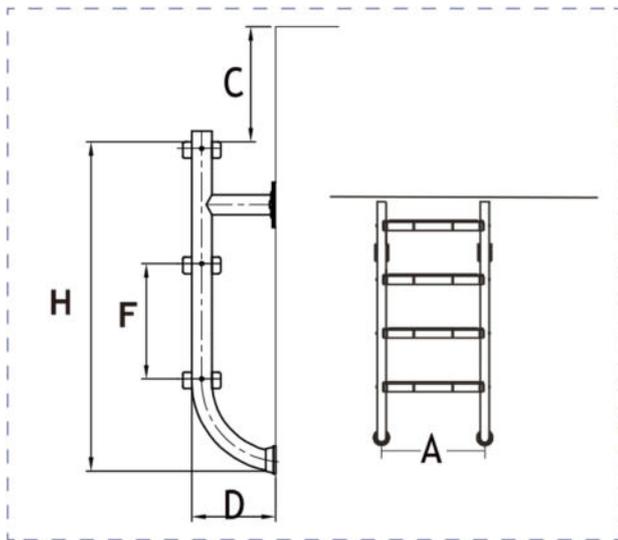

Model	Steps	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
S-202(A/B)	2	500	250	180	1022	250	450
S-203(A/B)	3	500	250	180	1022	250	710
S-204(A/B)	4	500	250	180	1022	250	960
S-205(A/B)	5	500	250	180	1022	250	1210



Blue StormTM
International



**PRIVATE &
COMMERCIAL
POOL**

PROFESSIONAL EQUIPMENT CATALOG 23|24

Blue Storm Intl.Corp.
23 Arbour Wood Close NW
Calgary, AB, Canada, T3G 4A7

Email: info@bluestorminternational.com
+1(403) 771 9117 | +1(403) 650 5878